


Darlington Transistors

PNP Silicon



MAXIMUM RATINGS

Rating	Symbol	MPSA62	MPSA63 MPSA64	Unit
Collector–Emitter Voltage	V_{CES}	–20	–30	Vdc
Collector–Base Voltage	V_{CBO}	–20	–30	Vdc
Emitter–Base Voltage	V_{EBO}	–10		Vdc
Collector Current — Continuous	I_C	–500		mAdc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	625	5.0	mW mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	1.5	12	Watts mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150		$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------


OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage ($I_C = -100 \mu\text{Adc}$, $V_{BE} = 0$)	MPSA62 MPSA63, MPSA64	$V_{(BR)CES}$	–20 –30	— —	Vdc
Collector Cutoff Current ($V_{CB} = -15 \text{ Vdc}$, $I_E = 0$) ($V_{CB} = -30 \text{ Vdc}$, $I_E = 0$)	MPSA62 MPSA63, MPSA64	I_{CBO}	— —	–100 –100	nAdc
Emitter Cutoff Current ($V_{EB} = -10 \text{ Vdc}$, $I_C = 0$)		I_{EBO}	—	–100	nAdc

MPSA62 thru MPSA64*

MPSA55, MPSA56
For Specifications,
See MPSA05, MPSA06 Data

*Motorola Preferred Device



CASE 29–04, STYLE 1
TO–92 (TO–226AA)

Preferred devices are Motorola recommended choices for future use and best overall value.

MPSA62 thru MPSA64

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Max	Unit	
ON CHARACTERISTICS(1)						
DC Current Gain (I _C = −10 mAdc, V _{CE} = −5.0 Vdc)	MPSA63 MPSA64 MPSA62	h _{FE}	5,000 10,000 20,000	— — —	—	
(I _C = −100 mAdc, V _{CE} = −5.0 Vdc)	MPSA63 MPSA64		10,000 20,000	— —		
Collector–Emitter Saturation Voltage (I _C = −10 mAdc, I _B = −0.01 mAdc) (I _C = −100 mAdc, I _B = −0.1 mAdc)	MPSA62 MPSA63, MPSA64		— —	−1.0 −1.5		Vdc
Base–Emitter On Voltage (I _C = −10 mAdc, V _{CE} = −5.0 Vdc) (I _C = −100 mAdc, V _{CE} = −5.0 Vdc)	MPSA62 MPSA63, MPSA64		— —	−1.4 −2.0		Vdc
SMALL–SIGNAL CHARACTERISTICS						
Current–Gain — Bandwidth Product(2) (I _C = −100 mAdc, V _{CE} = −5.0 Vdc, f = 100 MHz)	MPSA63, MPSA64	f _T	125	—	MHz	

1. Pulse Test: Pulse Width $\leq 300\text{ }\mu\text{s}$; Duty Cycle $\leq 2.0\%$.

2. $f_T = |h_{fe}| \cdot f_{test}$.

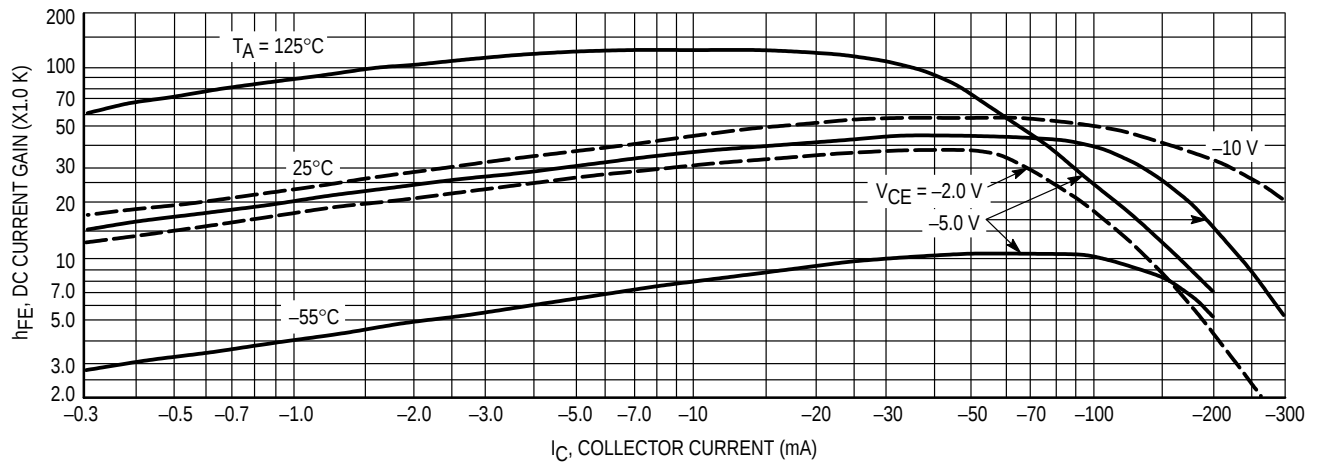


Figure 1. DC Current Gain

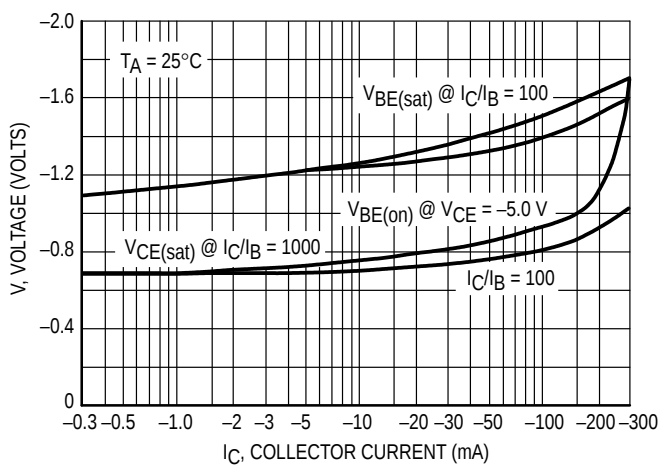


Figure 2. "On" Voltage

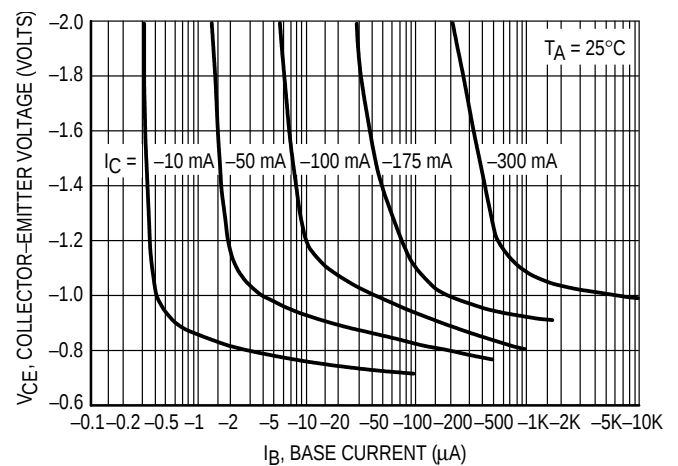


Figure 3. Collector Saturation Region

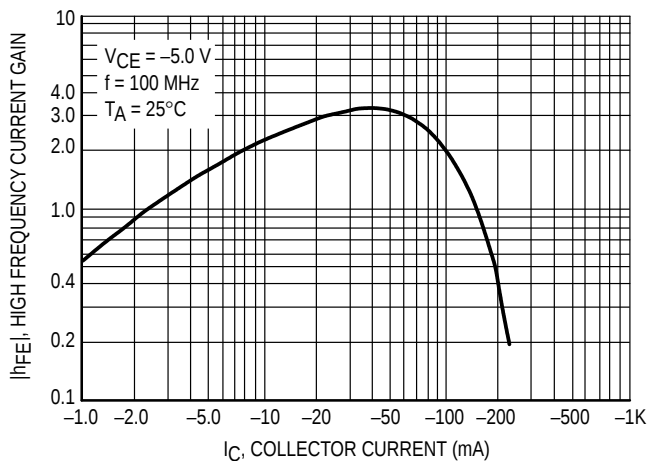


Figure 4. High Frequency Current Gain



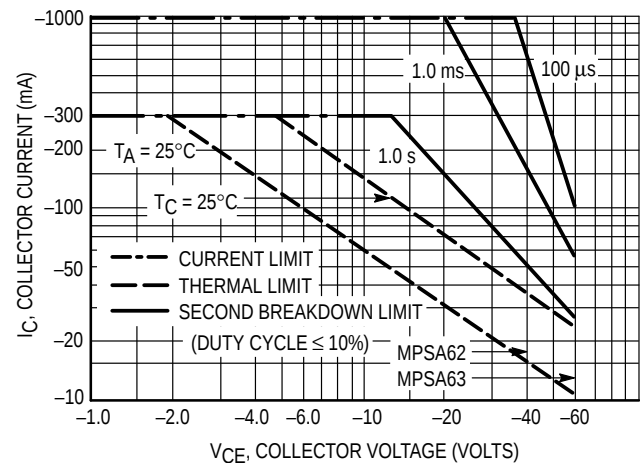


Figure 5. Active Region, Safe Operating Area

PACKAGE DIMENSIONS

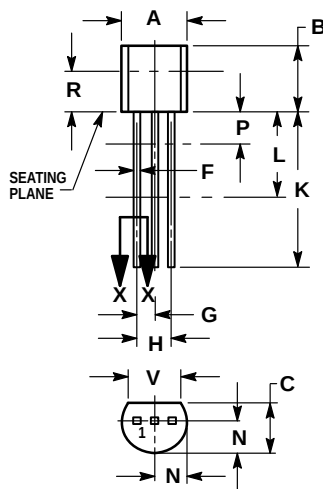

**CASE 029-04
(TO-226AA)
ISSUE AD**

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K. MINIMUM LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

STYLE 1:

1. PIN 1. EMITTER
2. BASE
3. COLLECTOR

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFA00@email.sps.mot.com – TOUCHTONE 602-244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MOTOROLA



MPSA62/D

