


COMMONWEALTH DC BRUSHLESS BLOWER

CIC-120-A


120x120x32mm

DESIGN FEATURES


- ***BEARING SYSTEM:** BALL BEARING & SLEEVE BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**

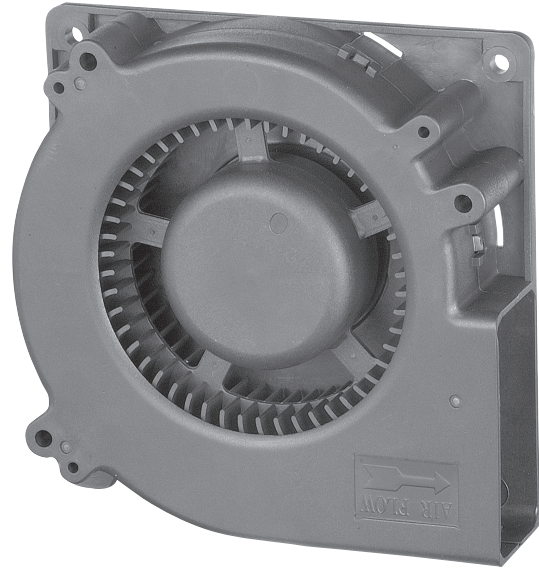

DIMENSIONS:MM

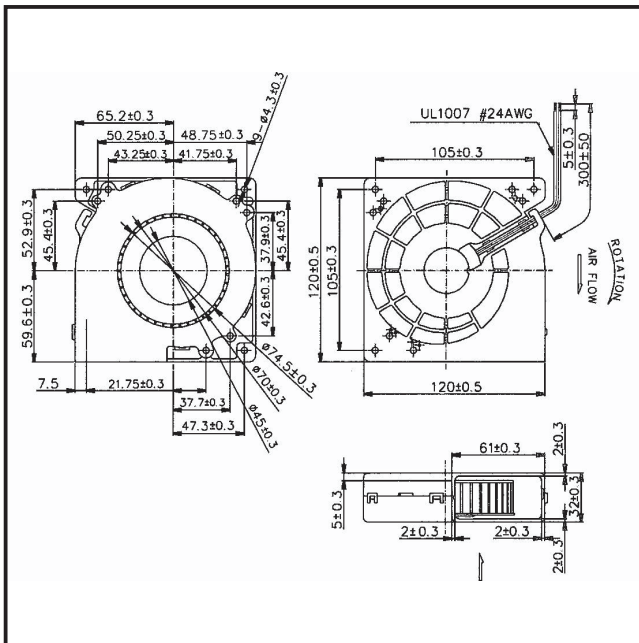

PERFORMANCE

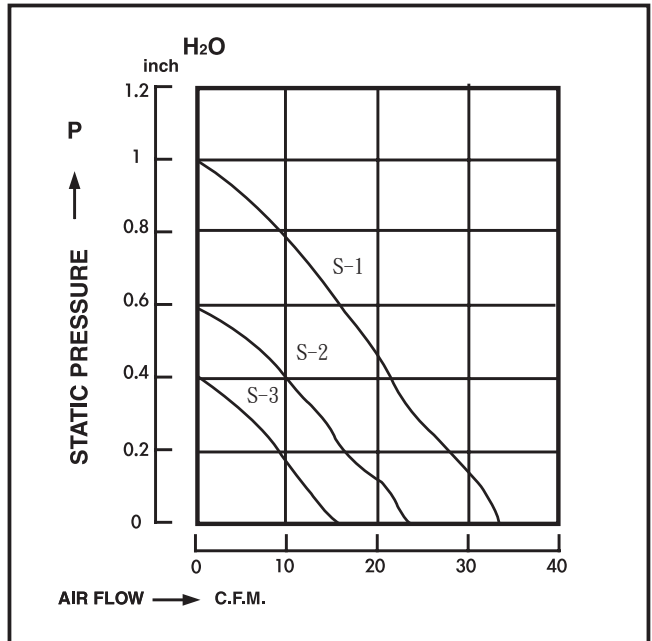

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
CIC-120-A	12	32.5	0.92	0.95	11.40	2800	1.00	54
(S-1)	24	32.5	0.92	0.54	12.96	2800	1.00	54
CIC-120-A	12	24.0	0.68	0.40	4.80	2000	0.60	46
(S-2)	24	24.0	0.68	0.32	7.68	2000	0.60	46
CIC-120-A	12	17.0	0.48	0.16	1.92	1400	0.40	32
(S-3)	24	17.0	0.48	0.11	2.64	1400	0.40	32