


COMMONWEALTH DC BRUSHLESS BLOWER

CIC-5015


50x50x15mm

DESIGN FEATURES


- *BEARING SYSTEM: BALL BEARING & SLEEVE BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *MOTOR: BRUSHLESS DC
- *CONNECTING: WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- *AVAILABLE FG TYPE FOR SPEED SENSOR SINGAL

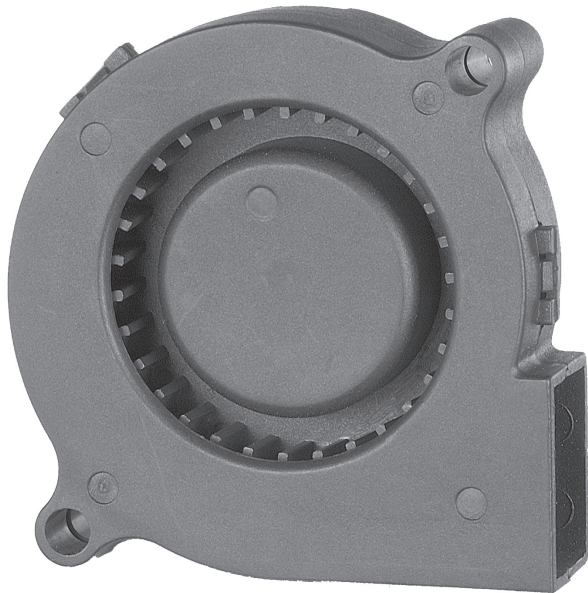

DIMENSIONS:MM

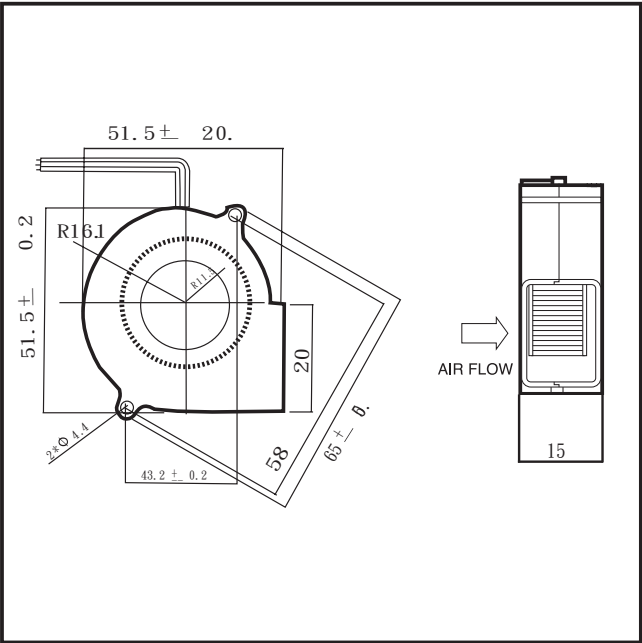

PERFORMANCE

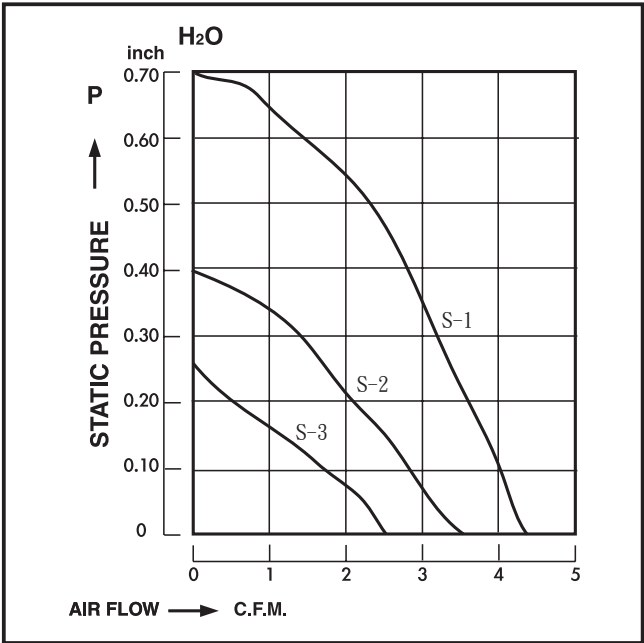

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE	AIR	VOLUME	CURRENT	POWER	SPEED	STATIC PRESSURE	NOISE
	(VDC)	(CFM)	(M ³ /MIN)	(A)	(W)	(RPM)	(INCH-H ₂ O)	(dBA)
CIC-5015	5	4.40	0.12	0.28	1.40	5000	0.70	38
(S-1)	12	4.40	0.12	0.14	1.78	5000	0.70	38
CIC-5015	5	3.50	0.10	0.18	0.90	4000	0.40	32
(S-2)	12	3.50	0.10	0.09	1.08	4000	0.40	32
CIC-5015	5	2.50	0.07	0.10	0.50	3000	0.24	25
(S-3)	12	2.50	0.07	0.06	0.72	3000	0.24	25