

## HIGH POWER SWITCHING USE



# CM600DY-12NF

## HIGH POWER SWITCHING USE

### MAXIMUM RATINGS (T<sub>j</sub> = 25°C, unless otherwise specified)

| Symbol                   | Parameter                     | Conditions                                     | Ratings    | Unit  |
|--------------------------|-------------------------------|------------------------------------------------|------------|-------|
| V <sub>CES</sub>         | Collector-emitter voltage     | G-E Short                                      | 600        | V     |
| V <sub>GES</sub>         | Gate-emitter voltage          | C-E Short                                      | ±20        | V     |
| I <sub>C</sub>           | Collector current             | DC, T <sub>C</sub> ' = 89°C <sup>*3</sup>      | 600        | A     |
| I <sub>CM</sub>          |                               | Pulse (Note 2)                                 | 1200       | A     |
| I <sub>E</sub> (Note 1)  | Emitter current               |                                                | 600        | A     |
| I <sub>EM</sub> (Note 1) |                               | Pulse (Note 2)                                 | 1200       | A     |
| P <sub>C</sub> (Note 3)  | Maximum collector dissipation | T <sub>C</sub> = 25°C                          | 1130       | W     |
| T <sub>j</sub>           | Junction temperature          |                                                | −40 ~ +150 | °C    |
| T <sub>stg</sub>         | Storage temperature           |                                                | −40 ~ +125 | °C    |
| V <sub>iso</sub>         | Isolation voltage             | Terminals to base plate, f = 60Hz, AC 1 minute | 2500       | Vrms  |
| —                        | Torque strength               | Main terminals M6 screw                        | 3.5 ~ 4.5  | N • m |
| —                        |                               | Mounting M6 screw                              | 3.5 ~ 4.5  | N • m |
| —                        | Weight                        | Typical value                                  | 580        | g     |

### ELECTRICAL CHARACTERISTICS (T<sub>j</sub> = 25°C, unless otherwise specified)

| Symbol                   | Parameter                            | Test conditions                                                                                                                         | Limits |                               |                     | Unit |
|--------------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|--------|-------------------------------|---------------------|------|
|                          |                                      |                                                                                                                                         | Min.   | Typ.                          | Max.                |      |
| I <sub>CES</sub>         | Collector cutoff current             | V <sub>CE</sub> = V <sub>CES</sub> , V <sub>GE</sub> = 0V                                                                               | —      | —                             | 1                   | mA   |
| V <sub>GE(th)</sub>      | Gate-emitter threshold voltage       | I <sub>C</sub> = 60mA, V <sub>CE</sub> = 10V                                                                                            | 5      | 6                             | 7.5                 | V    |
| I <sub>GES</sub>         | Gate leakage current                 | ±V <sub>GE</sub> = V <sub>GES</sub> , V <sub>CE</sub> = 0V                                                                              | —      | —                             | 0.5                 | μA   |
| V <sub>CE(sat)</sub>     | Collector-emitter saturation voltage | I <sub>C</sub> = 600A, V <sub>GE</sub> = 15V                                                                                            | —      | T <sub>j</sub> = 25°C<br>1.7  | 2.2                 | V    |
|                          |                                      |                                                                                                                                         |        | T <sub>j</sub> = 125°C<br>1.7 | —                   |      |
| C <sub>ies</sub>         | Input capacitance                    | V <sub>CE</sub> = 10V<br>V <sub>GE</sub> = 0V                                                                                           | —      | —                             | 90                  | nF   |
| C <sub>oes</sub>         | Output capacitance                   |                                                                                                                                         | —      | —                             | 11                  | nF   |
| C <sub>res</sub>         | Reverse transfer capacitance         |                                                                                                                                         | —      | —                             | 3.6                 | nF   |
| Q <sub>G</sub>           | Total gate charge                    | V <sub>CC</sub> = 300V, I <sub>C</sub> = 600A, V <sub>GE</sub> = 15V                                                                    | —      | 2400                          | —                   | nC   |
| t <sub>d(on)</sub>       | Turn-on delay time                   | V <sub>CC</sub> = 300V, I <sub>C</sub> = 600A<br>V <sub>GE</sub> = ±15V<br>R <sub>G</sub> = 1Ω, Inductive load<br>I <sub>E</sub> = 600A | —      | —                             | 500                 | ns   |
| t <sub>r</sub>           | Turn-on rise time                    |                                                                                                                                         | —      | —                             | 300                 | ns   |
| t <sub>d(off)</sub>      | Turn-off delay time                  |                                                                                                                                         | —      | —                             | 750                 | ns   |
| t <sub>f</sub>           | Turn-off fall time                   |                                                                                                                                         | —      | —                             | 300                 | ns   |
| t <sub>rr</sub> (Note 1) | Reverse recovery time                |                                                                                                                                         | —      | —                             | 250                 | ns   |
| Q <sub>rr</sub> (Note 1) | Reverse recovery charge              |                                                                                                                                         | —      | 8.7                           | —                   | μC   |
| V <sub>EC</sub> (Note 1) | Emitter-collector voltage            | I <sub>E</sub> = 600A, V <sub>GE</sub> = 0V                                                                                             | —      | —                             | 2.6                 | V    |
| R <sub>th(j-c)Q</sub>    | Thermal resistance <sup>*1</sup>     | IGBT part (1/2 module)                                                                                                                  | —      | —                             | 0.11                | K/W  |
| R <sub>th(j-c)R</sub>    |                                      | FWDi part (1/2 module)                                                                                                                  | —      | —                             | 0.18                | K/W  |
| R <sub>th(c-f)</sub>     | Contact thermal resistance           | Case to heat sink, Thermal compound Applied <sup>*2</sup> (1/2 module)                                                                  | —      | 0.02                          | —                   | K/W  |
| R <sub>th(j-c')Q</sub>   | Thermal resistance                   | Case temperature measured point is just under the chips                                                                                 | —      | —                             | 0.046 <sup>*3</sup> | K/W  |
| R <sub>G</sub>           | External gate resistance             |                                                                                                                                         | 1.0    | —                             | 10                  | Ω    |

\*1 : Case temperature (T<sub>C</sub>) measured point is shown in page OUTLINE DRAWING.

\*2 : Typical value is measured by using thermally conductive grease of λ = 0.9[W/(m • K)].

\*3 : Case temperature (T<sub>C</sub>) measured point is just under the chips.

If you use this value, R<sub>th(f-a)</sub> should be measured just under the chips.

Note 1. I<sub>E</sub>, V<sub>EC</sub>, t<sub>rr</sub> & Q<sub>rr</sub> represent characteristics of the anti-parallel, emitter-collector free-wheel diode (FWDi).

2. Pulse width and repetition rate should be such that the device junction temperature (T<sub>j</sub>) does not exceed T<sub>jmax</sub> rating.


3. Junction temperature (T<sub>j</sub>) should not increase beyond 150°C.

# CM600DY-12NF


HIGH POWER SWITCHING USE

## PERFORMANCE CURVES


OUTPUT CHARACTERISTICS  
(TYPICAL)

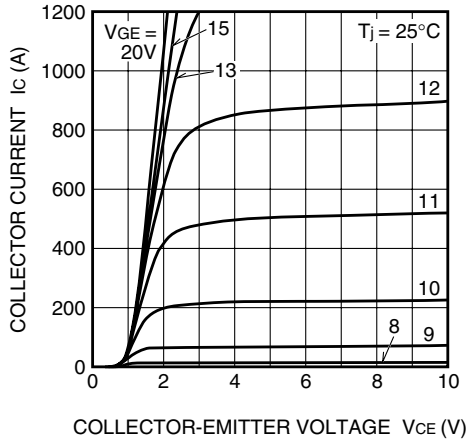


COLLECTOR-EMITTER SATURATION  
VOLTAGE CHARACTERISTICS  
(TYPICAL)

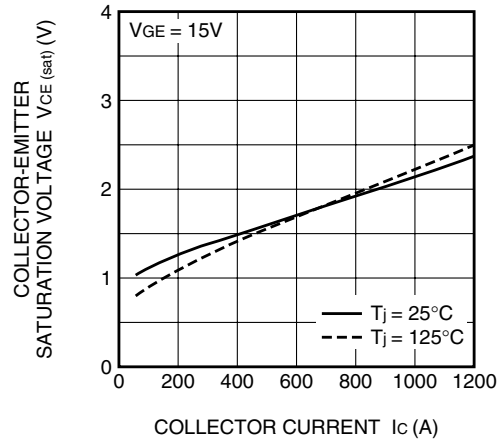


COLLECTOR-EMITTER SATURATION  
VOLTAGE CHARACTERISTICS  
(TYPICAL)

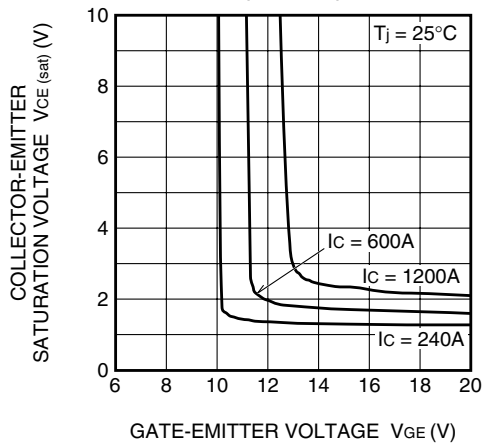


FREE-WHEEL DIODE  
FORWARD CHARACTERISTICS  
(TYPICAL)

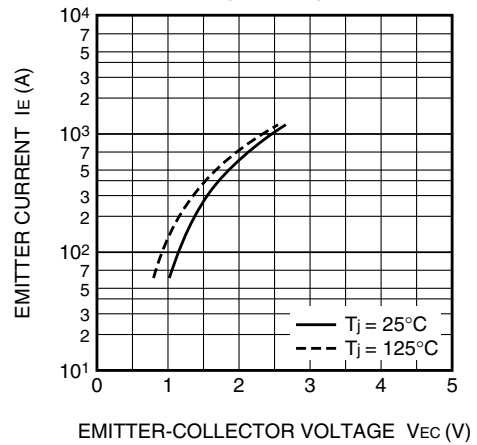

CAPACITANCE- $V_{CE}$   
CHARACTERISTICS  
(TYPICAL)

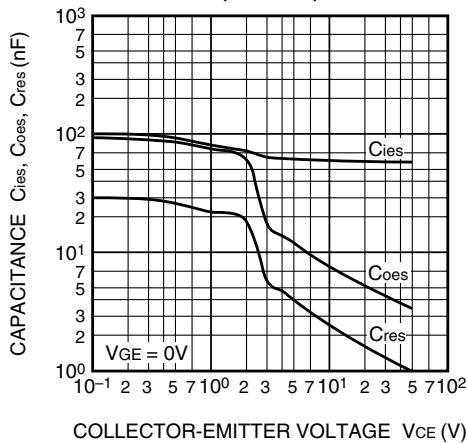


HALF-BRIDGE  
SWITCHING CHARACTERISTICS  
(TYPICAL)

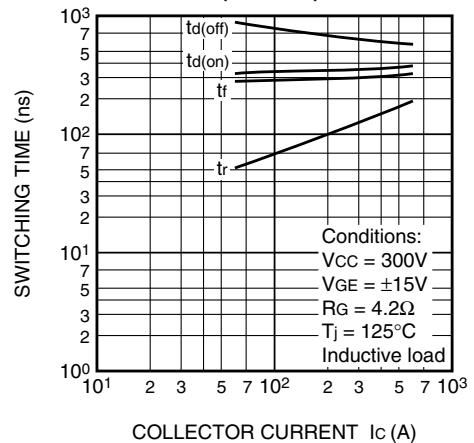


# CM600DY-12NF

HIGH POWER SWITCHING USE

**REVERSE RECOVERY CHARACTERISTICS  
OF FREE-WHEEL DIODE  
(TYPICAL)**

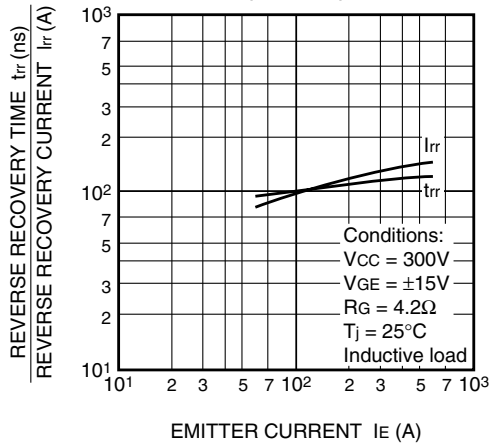

**TRANSIENT THERMAL  
IMPEDANCE CHARACTERISTICS  
(IGBT part & FWDi part)**

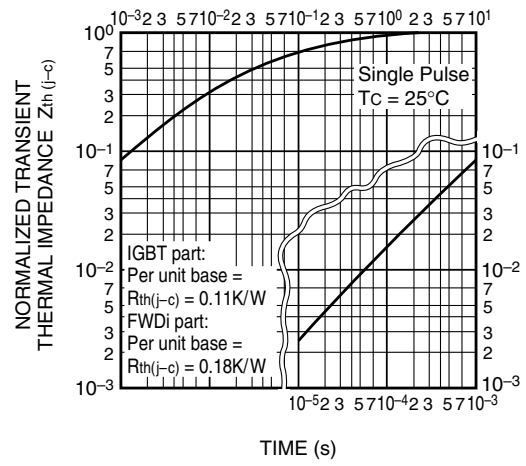

**GATE CHARGE  
CHARACTERISTICS  
(TYPICAL)**

