

COMMONWEALTH DC BRUSHLESS FAN

FP-108M/DC


120x120x25.4mm

DESIGN FEATURES


- ***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**



DIMENSIONS:MM

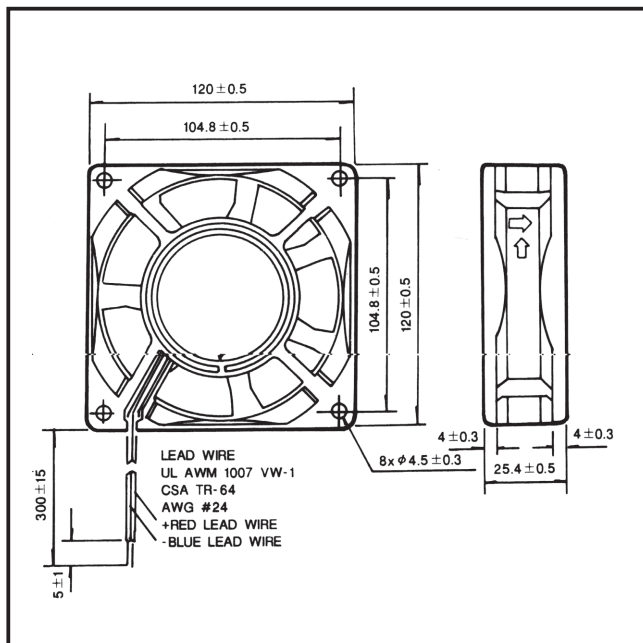

PERFORMANCE

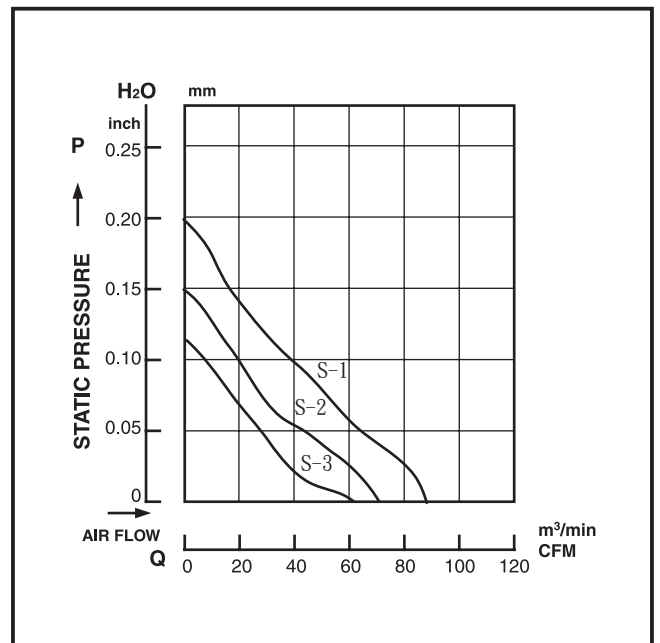

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108M/DC (S-1)	12	88	2.5	0.36	4.32	3000	0.20	45
	24	88	2.5	0.24	5.76	3000	0.20	45
FP-108M/DC (S-2)	12	75	2.1	0.25	3.00	2500	0.15	42
	24	75	2.1	0.18	4.32	2500	0.15	42
FP-108M/DC (S-3)	12	62	1.8	0.14	1.68	2000	0.12	25
	24	62	1.8	0.10	2.40	2000	0.12	25