

COMMONWEALTH DC BRUSHLESS FAN

FP-108R/DC


70x70x15mm

DESIGN FEATURES

- ***BEARING SYSTEM:** BALL BEARING & SLEEVE BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
- ***A** S-2 MEDIUM SPEED TYPE
- S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**




DIMENSIONS:MM

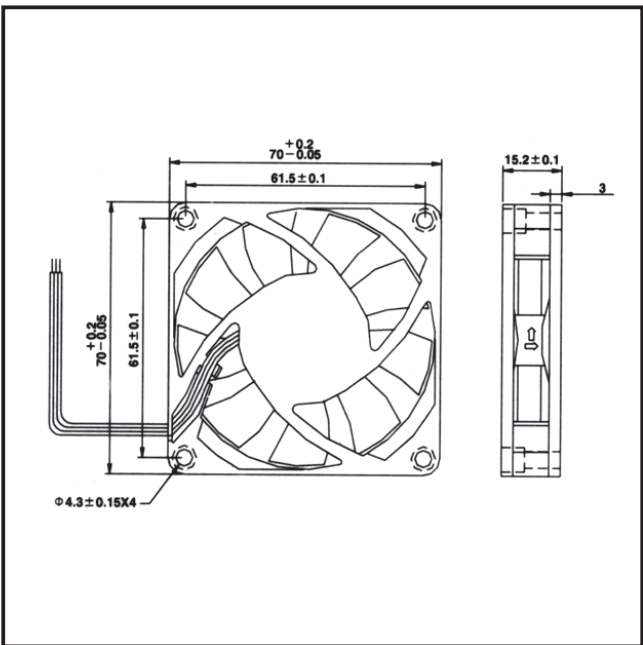

SPECIFICATIONS

PERFORMANCE

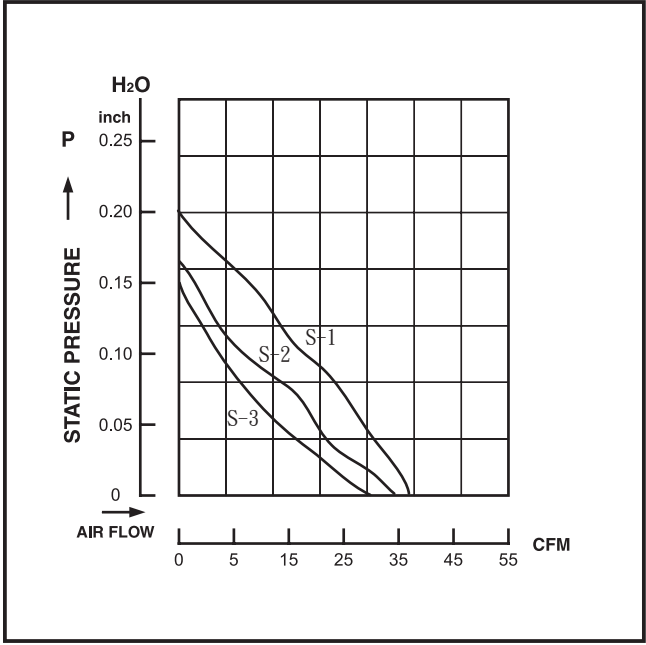

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108R/DC (S-1)	12	37	1.05	0.34	4.08	4500	0.20	39
	24	37	1.05	0.27	6.48	4500	0.20	39
FP-108R/DC (S-2)	12	35	0.98	0.28	3.36	4200	0.17	38
	24	35	0.98	0.24	5.76	4200	0.17	38
FP-108R/DC (S-3)	12	31	0.88	0.24	2.88	3800	0.15	34
	24	31	0.88	0.20	4.80	3800	0.15	34