


COMMONWEALTH DC BRUSHLESS FAN

FP-108RX/DC


70x70x25mm

DESIGN FEATURES


- ***BEARING SYSTEM:** BALL BEARING & SLEEVE BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**

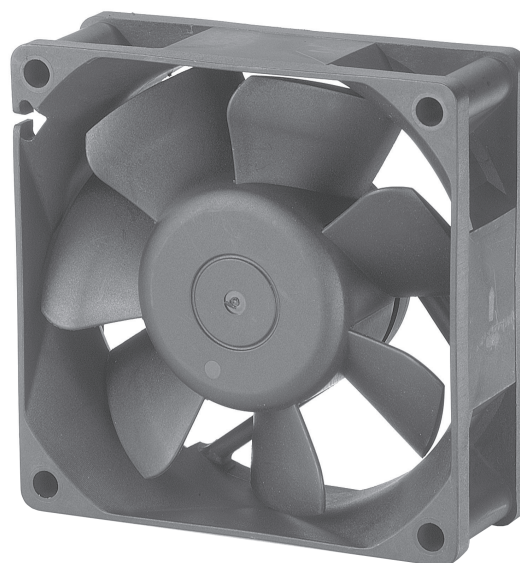

DIMENSIONS:MM

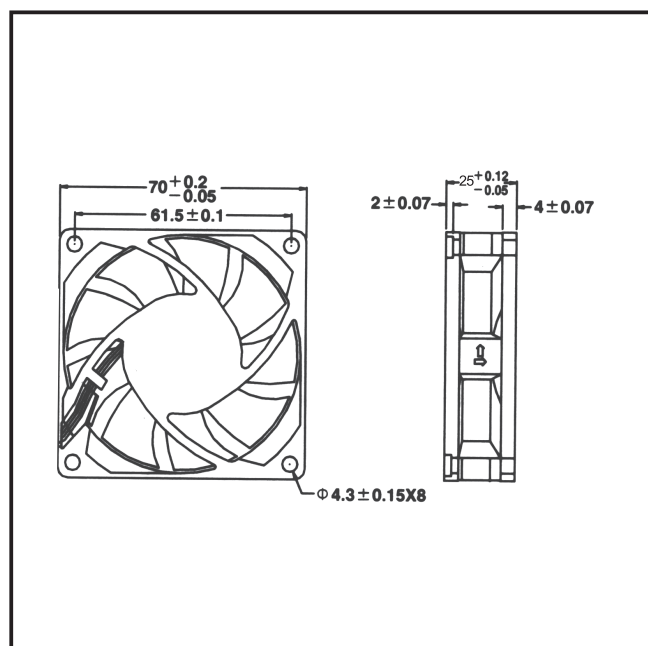

PERFORMANCE

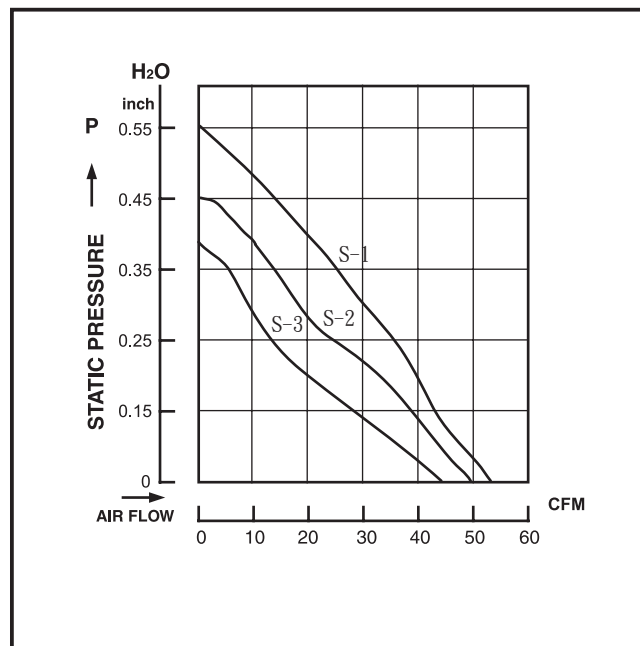

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108RX/DC (S-1)	12	54.0	1.53	0.62	7.44	6000	0.55	47
FP-108RX/DC (S-2)	12	50.0	1.40	0.52	6.24	5500	0.45	45
FP-108RX/DC (S-3)	12	45.3	1.28	0.33	3.96	5000	0.39	42