


COMMONWEALTH DC BRUSHLESS FAN

FP-108GT/DC


40x40x28mm

DESIGN FEATURES


- ***BEARING SYSTEM:** BALL BEARING & SLEEVE BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**

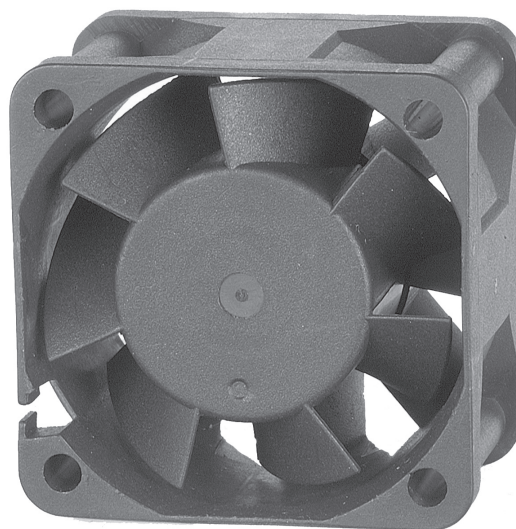

DIMENSIONS:MM

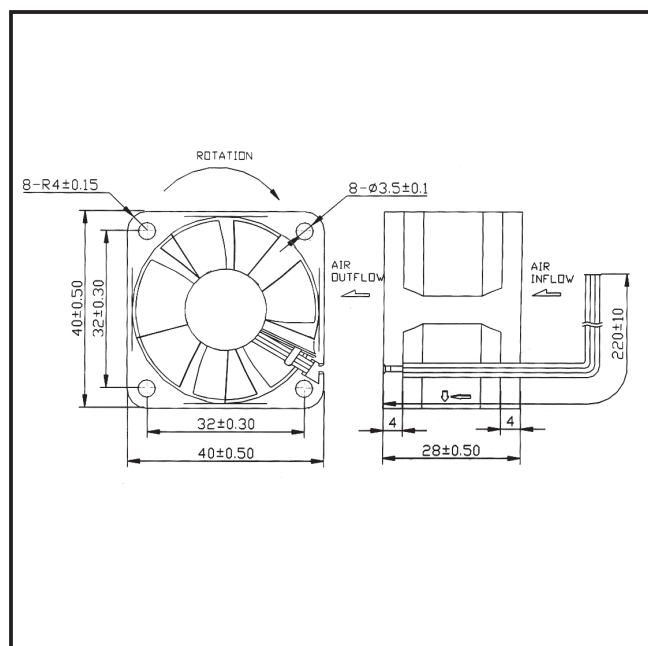

PERFORMANCE

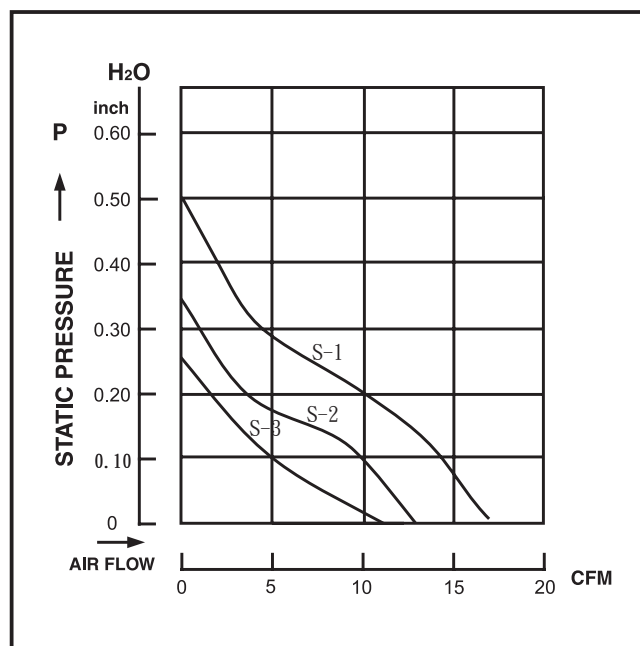

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108GT/DC (S-1)	12	15.50	0.44	0.28	3.36	10000	0.50	43
	24	15.50	0.44	0.18	4.32	10000	0.50	43
FP-108GT/DC (S-2)	12	12.50	0.35	0.14	1.68	8000	0.32	38
	24	12.50	0.35	0.10	2.40	8000	0.32	38
FP-108GT/DC (S-3)	12	11.00	0.31	0.10	1.20	7000	0.25	35
	24	11.00	0.31	0.08	1.92	7000	0.25	35