


COMMONWEALTH DC BRUSHLESS FAN

FP-108S/DC


30x30x10mm

DESIGN FEATURES


- ***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**

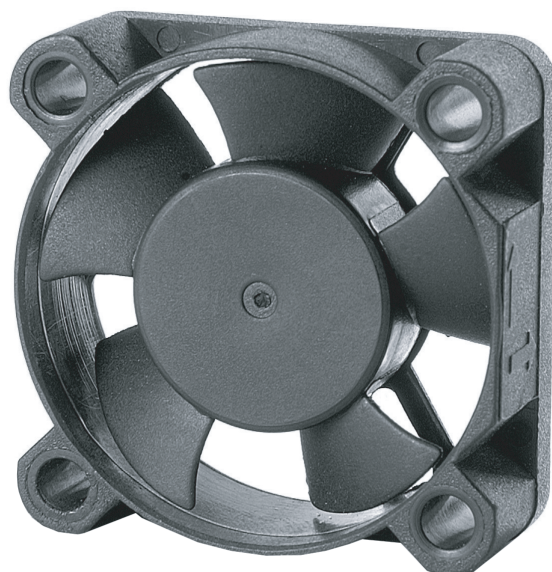

DIMENSIONS:MM

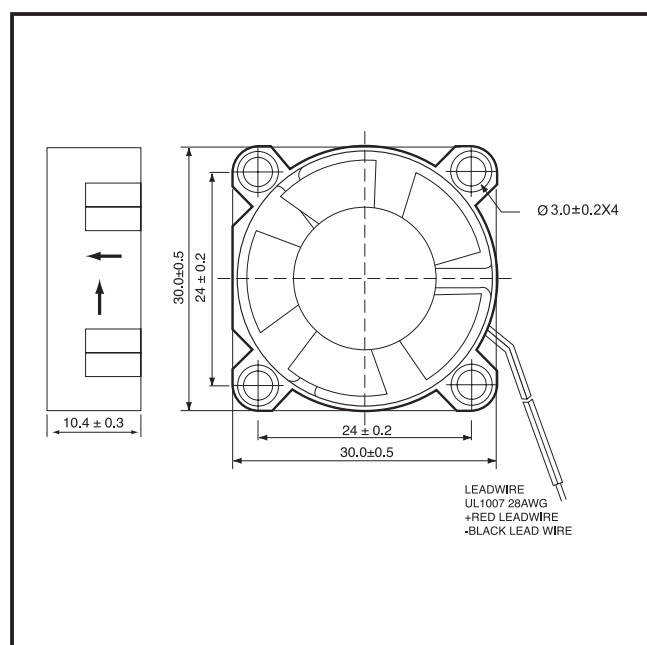

PERFORMANCE

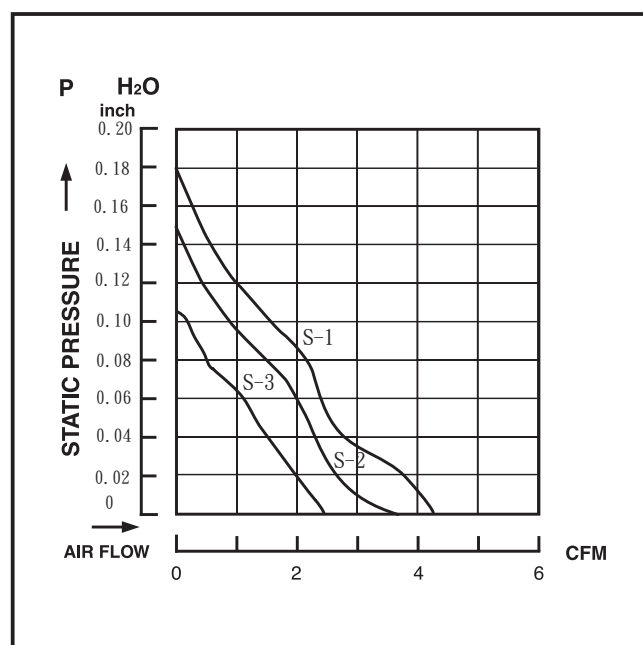

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108S/DC (S-1)	5	4.23	0.12	0.21	1.05	9500	0.18	28
	12	4.23	0.12	0.12	1.44	9500	0.18	28
FP-108S/DC (S-2)	5	3.56	0.10	0.18	0.90	8000	0.15	23
	12	3.56	0.10	0.11	1.32	8000	0.15	23
FP-108S/DC (S-3)	5	2.45	0.07	0.09	0.45	5500	0.10	20
	12	2.45	0.07	0.06	0.72	5500	0.10	20